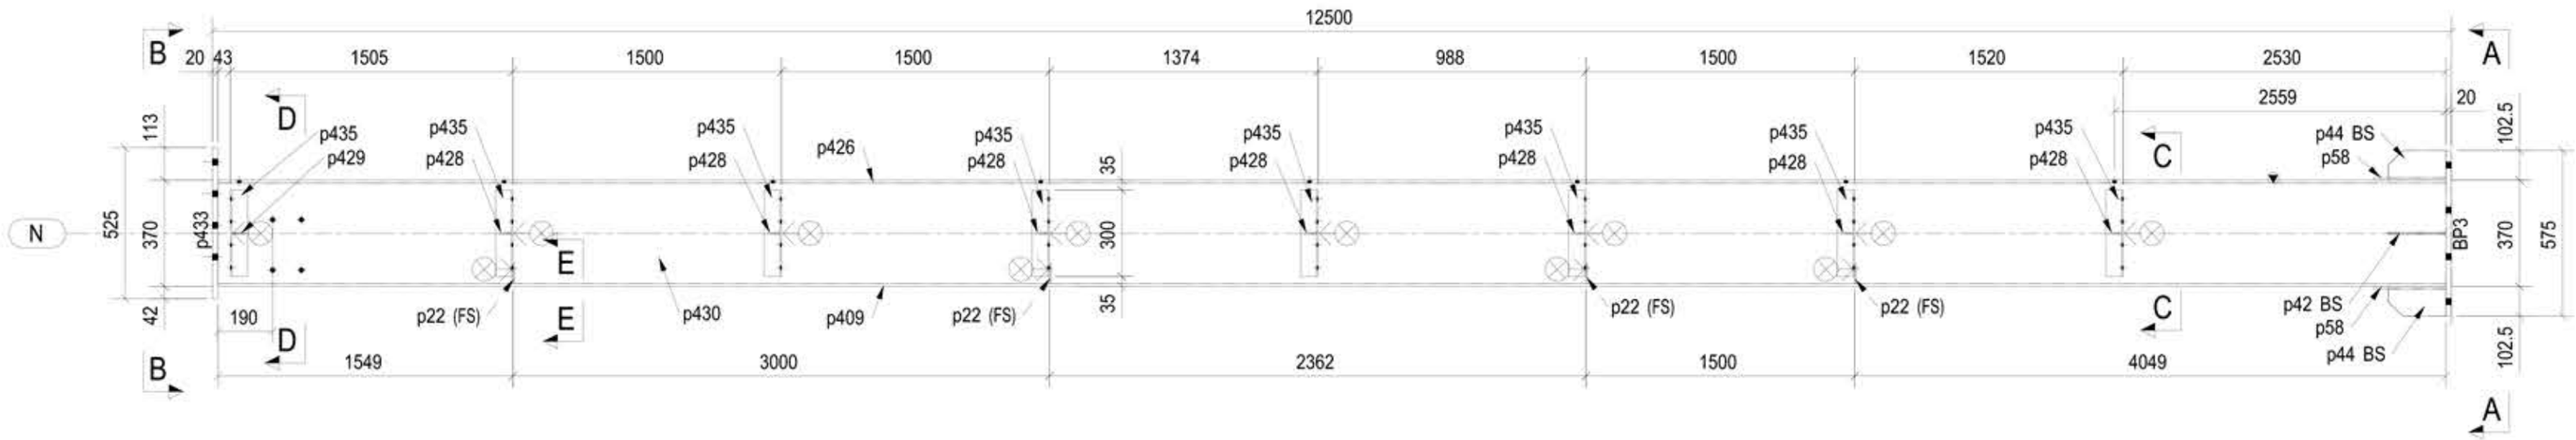

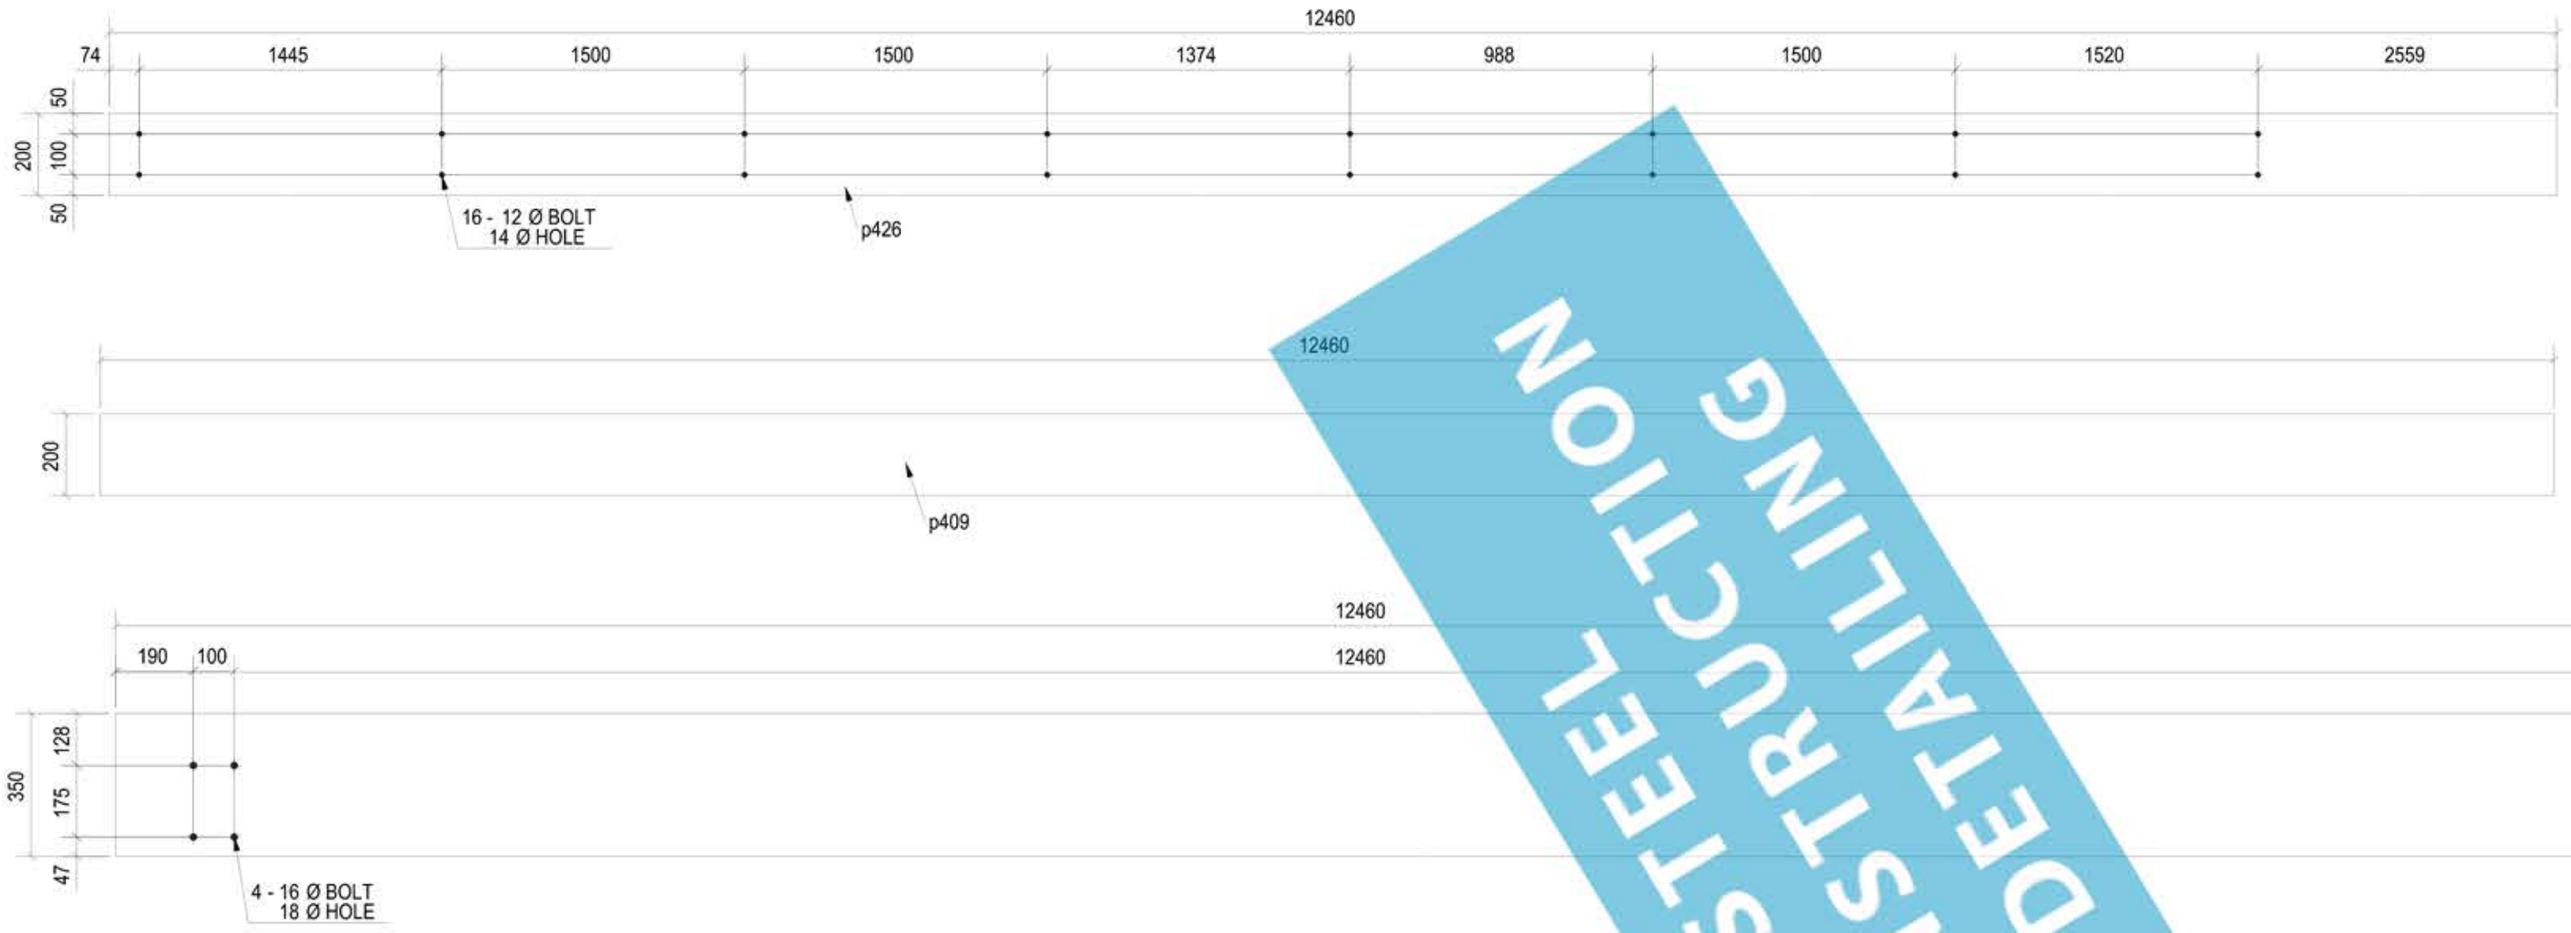

SHOP MATERIAL LIST FOR 1 ASSEMBLY				
MARK	SIZE	LENGTH MM	Total Qty.	WEIGHT KG.
p435	BLL344.5*60*5	300	8	37.63
BP3	PLT20*350	575	1	31.60
p22	PLT5*70	70	4	0.76
p42	PLT6*100	200	2	1.77
p44	PLT6*95	200	4	3.32
p58	PLT8*250	350	2	10.68
p409	PL10*200	12460	1	195.62
p426	PL10*200	12460	1	195.62
p428	PLT6*45	330	7	3.05
p429	PLT6*45	143	1	0.19
p430	PLT5*350	12460	1	171.17
p433	PLT20*250	525	1	20.61
		TOTAL WEIGHT		672.02

NUMBER OF COLUMN ASSEMBLY = 1

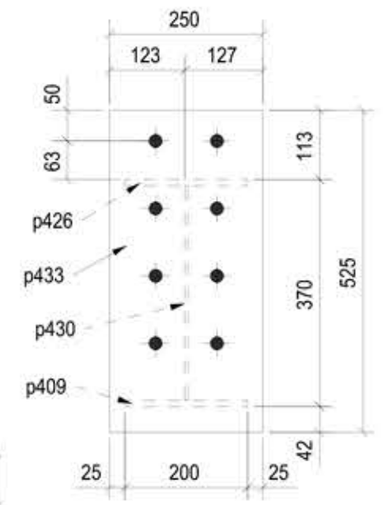

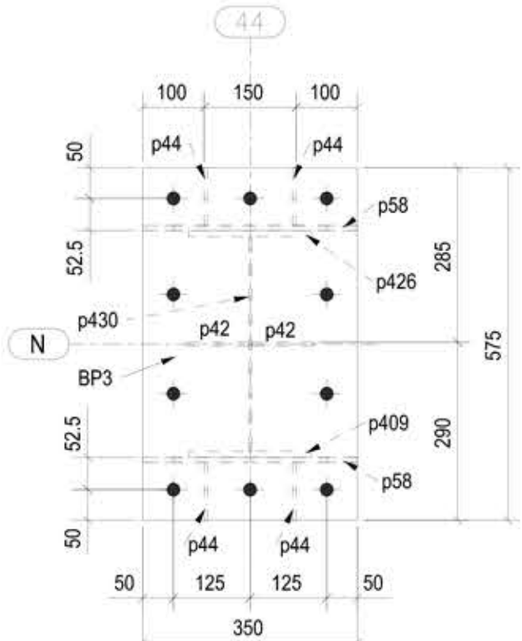

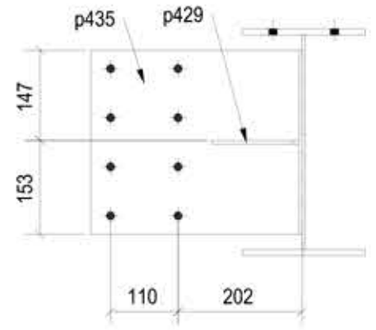

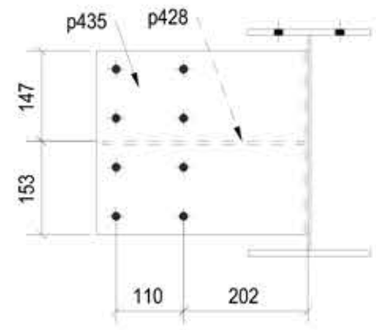

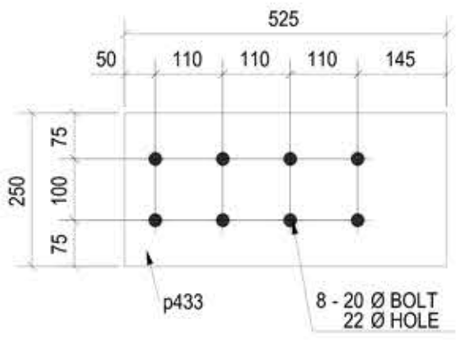

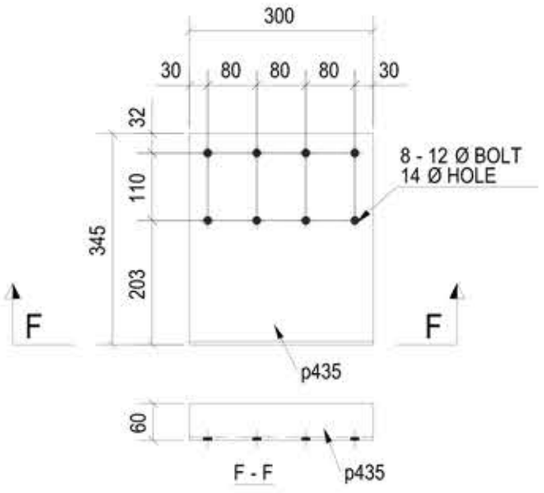

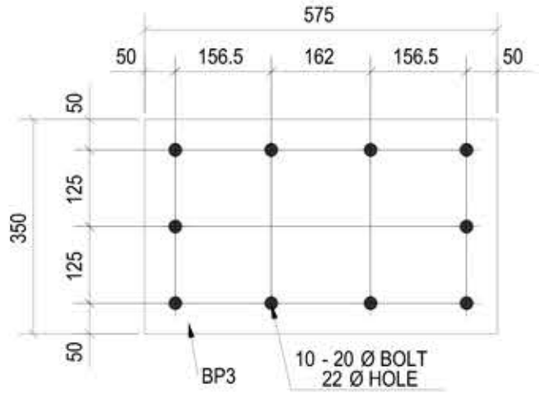

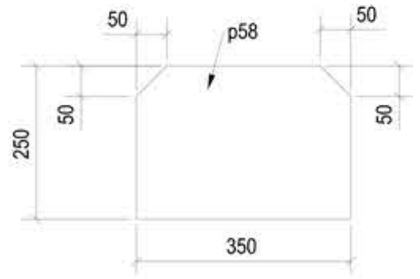

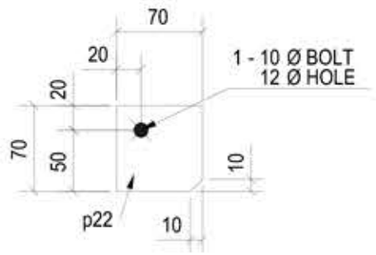







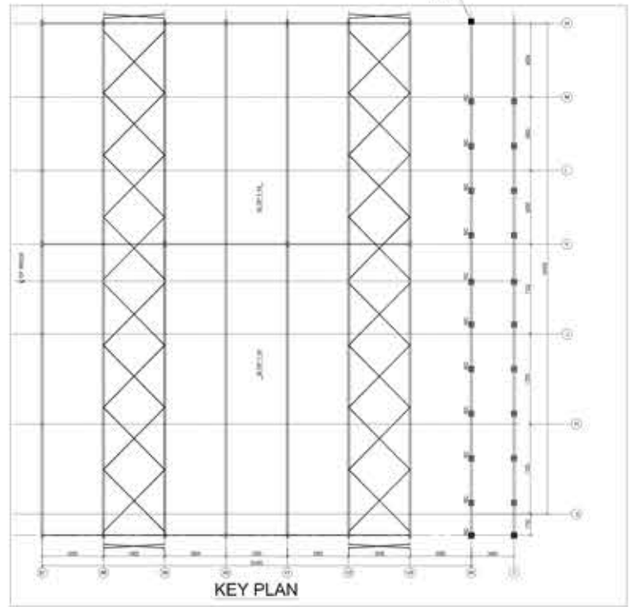

NOTES:
1).UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MM.
2).TOLERANCE FOR ALL ATTACHED COMPONENTS & C/D SHALL BE ±1mm.
3).TOLERANCE OVERALL LENGTH OF COLUMN & RAFTER ± 2mm.
5). ALL BOLTS ARE 16mm Ø U.N.O.
6). INDICATES CONNECTING SIDE MARK
7). INDICATES DIMENSION FACE MARK
8). FS = FAR SIDE
9). NS = NEAR SIDE
10). BS = BOTH SIDE
11). ORIENTATION MARK

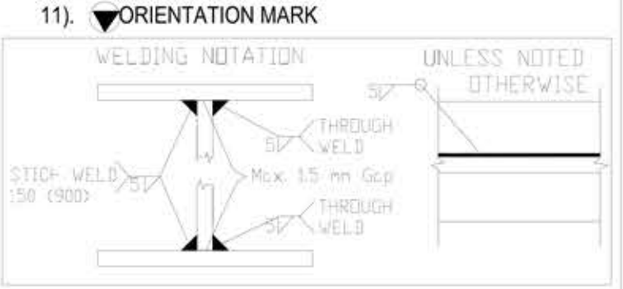

STEEL CONSTRUCTION DETAILING

DATE :-

PROJECT : -

ITICA CERAMIC AT MORBI
AT - MORBI (SHED - 2)

REV.	DESCRIPTION	DATE
A	FOR FABRICATION	

CLIENT : -

DRAWING

COLUMN C6

SCALE :-	DRAWN:-	CHECKED :-	REVISION :-
NOT TO SCALE			

SHREE PREFAB STEELS P LIMITED.
PLOT NO.453 ,Opp. Chacharwadi Bus Stop,
Nr SPI ContainerOpp. Divya Bhaskar Press,
Chnagodar Bavla Road,Chacharwadi.
Phone: 079-65413309 , 40075253
Fax: 079-30022795
Mobile: 09099972642

DRAWING NO :- C6